


S P R O C K E T S

Z	d _e	d _p	SINGLE			DOUBLE		
			d _m	D ₁	A	d _m	D ₁	A
8	24.0	20.90	13	6	12	12	8	18
9	26.6	23.39	15	6	12	15	8	18
10	29.2	25.89	17	8	12	17	8	18
11	31.7	28.39	18	8	13	19	10	18
12	34.2	30.91	20	8	13	21	10	18
13	36.7	33.42	23	8	13	24	10	18
14	39.2	35.95	25	8	13	26	10	18
15	41.7	38.48	28	8	13	29	10	18
16	44.3	41.01	30	8	14	32	10	20
17	46.8	43.53	30	8	14	34	10	20
18	49.3	46.07	30	8	14	37	10	20
19	51.9	48.61	30	8	14	39	10	20
20	54.4	51.14	30	8	14	40	10	20
21	57.0	53.68	35	8	14	40	10	20
22	59.5	56.21	35	8	14	40	10	20
23	62.0	58.75	35	8	14	40	10	20
24	64.6	61.29	35	8	14	40	10	20
25	67.5	63.83	35	8	14	40	10	20
28	69.5	66.37	40	10	16	50	12	22
27	72.2	68.91	40	10	16	50	12	22
28	74.8	71.45	40	10	16	50	12	22
29	77.3	73.99	40	10	16	50	12	22
30	79.8	76.53	40	10	16	50	12	22
31	82.4	79.08	40	10	16	60	12	22
32	84.9	81.61	40	10	16	60	12	22
33	87.5	84.16	40	10	16	60	12	22
34	90.0	86.70	40	10	16	60	12	22
35	92.5	89.25	40	10	16	60	12	22
36	95.0	91.79	40	10	16	60	12	22
37	97.6	94.33	40	10	16	60	12	22
38	100.2	96.88	40	10	16	60	12	22
39	102.7	99.42	40	10	16	60	12	22
40	105.3	101.97	40	10	16	60	12	22
45	118.0	114.69	60	12	20			
50	130.7	127.41	60	12	20			
57	148.6	145.22	80	14	20			
76	197.7	193.59	80	20	25			

8 x 3 mm

for roller chains in compliance with DIN 8187 ISO/R 606

The wheel disc size is increased by h = 4mm for Z.57 and Z.76

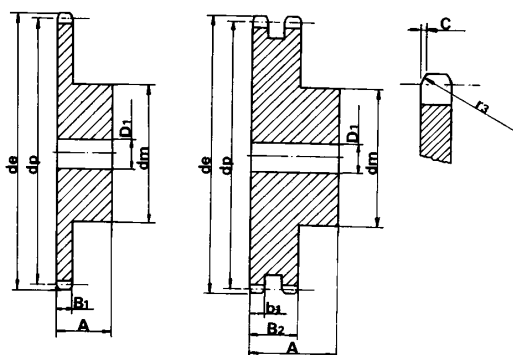

SPROCKET

	mm
TOOTH RADIUS r ₃	8
RADIUS WIDTH C	1.0
SPROCKET TOOTH WIDTH B ₁	2.8
SPROCKET TOOTH WIDTH b ₁	2.7
SPROCKET TOOTH WIDTH B ₂	8.3

CHAIN

	mm
PITCH	8
INTERNAL WIDTH	3
ROLLER - ø	5

MATERIAL: C 45 UNI 7847


P L A T E W H E E L S

Z	d _e	d _p	S D		Z	d _e	d _p	S D	
			D ₁	D ₂				D ₁	D ₂
8	24.0	20.90	6	6	44	115.5	112.14	12	14
9	26.6	23.39	6	6	45	118.0	114.69	12	14
10	29.2	25.89	8	8	46	120.6	117.23	12	14
11	31.7	28.39	8	8	47	123.1	119.77	12	14
12	34.2	30.91	8	8	48	125.6	122.32	12	14
13	36.7	33.42	8	8	49	128.2	124.86	12	14
14	39.2	35.95	8	8	50	130.7	127.41	12	14
15	41.7	38.48	8	8	51	133.3	129.95	14	16
16	44.3	41.01	8	10	52	135.8	132.49	14	16
17	46.8	43.53	8	10	53	138.4	135.04	14	16
18	49.3	46.07	8	10	54	140.9	137.59	14	16
19	51.9	48.61	8	10	55	143.5	140.13	14	16
20	54.4	51.14	8	10	56	146.0	142.68	14	16
21	57.0	53.68	8	10	57	148.6	145.22	14	16
22	59.5	56.21	8	10	58	151.0	147.77	14	16
23	62.0	58.75	8	10	59	153.6	150.31	14	16
24	64.6	61.29	8	10	60	156.2	152.85	14	16
25	67.5	63.83	8	10	62	162.0	157.95	16	20
26	69.5	66.37	10	12	64	167.1	163.04	16	20
27	72.2	68.91	10	12	65	169.6	165.58	16	20
28	74.8	71.45	10	12	66	172.2	168.13	16	20
29	77.3	73.99	10	12	68	177.3	173.22	16	20
30	79.8	76.53	10	12	70	182.4	178.31	16	20
31	82.4	79.08	10	12	72	187.5	183.41	20	20
32	84.9	81.61	10	12	75	195.1	191.04	20	20
33	87.5	84.16	10	12	76	197.7	193.59	20	20
34	90.0	86.70	10	12	78	202.8	198.68	20	20
35	92.5	89.25	10	12	80	207.9	203.77	20	20
36	95.0	91.79	10	12	85	220.6	216.50	20	20
37	97.6	94.33	10	12	90	233.4	229.23	20	20
38	100.2	96.88	10	12	95	246.1	241.96	20	20
39	102.7	99.42	10	12	100	258.9	254.68	20	20
40	105.3	101.97	10	12	110	284.3	280.15	20	20
41	107.8	104.51	12	14	114	294.5	290.33	20	20
42	110.4	107.05	12	14	120	310.0	305.61	20	20
43	112.9	109.60	12	14	125	322.5	318.34	20	20

8 x 3 mm

for roller chains in compliance with DIN 8187 ISO/R 606

The wheel disc size is increased by h = 4mm starting from Z.46

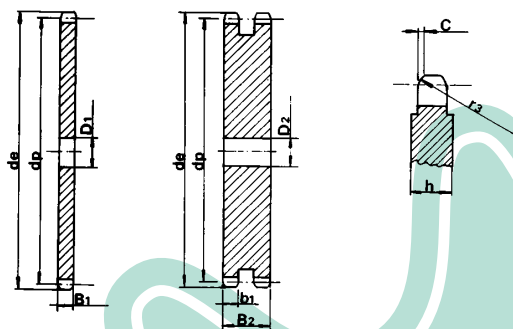

PLATEWHEEL

	mm
TOOTH RADIUS r ₃	8
RADIUS WIDTH C	1.0
PLATE TOOTH WIDTH B ₁	2.8
PLATE TOOTH WIDTH b ₁	2.7
PLATE TOOTH WIDTH B ₂	8.3

CHAIN

	mm
PITCH	8
INTERNAL WIDTH	3
ROLLER - ø	5